


PURCHASE REQUEST

Vincent A. Isii
VINCENT A. ISII
 Supervising Administrative Officer

Entity Name: MARIVELES MENTAL HOSPITAL

Fund Cluster: 01

Office/Section : EFMU PR No.: 2019050205 Date: 30 MAY 2019
 Responsibility Center Code : hop-efm

Stock/ Property No.	Unit	Item Description	Quantity	Unit Cost	Total Cost
	lot	(EFM-060) Materials for installation of door and fixed glass enclosure and fabrication of fixed desks in front of kitchen for New Canteen	1	108,530.00	108,530.00
nothing follows					
FUNDS AVAILABLE					
 LAARNI D. MAGLAQUI Supervising Administrative Officer					
				TOTAL	108,530.00

Purpose:
 For the use of hospital (Installation of door and fixed glass enclosure and fabrication of fixed desks in front of kitchen for new Canteen).

Requested By: *Melvin Jan A. Yabut* Approved By: *Maria Lourdes L. Evangelista*
 Signature : _____
 Printed Name MELVIN JAN A. YABUT MARIA LOURDES L. EVANGELISTA, MD, DSBPP
 Designation : Engineer IV Chief of Hospital II



Republic of the Philippines
DEPARTMENT OF HEALTH
MARIVELES MENTAL HOSPITAL
Mariveles, Bataan



PROJECT TITLE : INSTALLATION OF DOOR AND FIXED GLASS ENCLOSURE AND
FABRICATION OF FIXED DESKS INFRONT OF KITCHEN
LOCATION : NEW CANTEEN

COST ESTIMATE

ITEM	DESCRIPTION	QTY.	UNIT	MATERIALS		LABOR	EQUIPMENT	TOTAL
				UNIT COST	TOTAL COST	TOTAL COST	TOTAL COST	
1	Anodized double-slide door w/ 8mm THK clear fixed glass and fixed glass transom above (1.2X2.10)	1	set	7,600.00	7,600.00			
2	Anodized w/ 10mm THK. Clear fixed glass curtain wall (21.48sq.m)	1	set	64,500.00	64,500.00			
					72,100.00	16,800.00	-	88,900.00
3	Plywood, 3/4" marine	3	pieces	1,500.00	4,500.00			
4	Concealed Hinges #3	16	pieces	250.00	4,000.00			
5	Cabinet Handle #3	8	pieces	120.00	960.00			
6	Wood Glue	1	liter	150.00	150.00			
7	Wood treatment	1	liter	420.00	420.00			
8	Finishing nail 1"	2	kilograms	90.00	180.00			
9	Finishing nail 2"	1	kilograms	90.00	90.00			
10	Finishing nail 2 1/2"	1	kilograms	90.00	90.00			
11	Finishing nail 1 1/2"	1	kilograms	90.00	90.00			
12	Tox and screw #6	24	pairs	85.00	2,040.00			
13	Masonry drill bit 1/4"	6	pieces	85.00	510.00			
	nothing follows				13,030.00	5,600.00	1,000.00	19,630.00
							TOTAL	108,530.00

Prepared by :



MELVIN JAN A. YABUT, CE
Engineer IV

Recommending Approval :


EMILY V. RAYMUNDO, MPA
Chief Administrative Officer

Approved :


MARIA LOURDES L. EVANGELISTA, MD, DSBPP
Chief of Hospital II

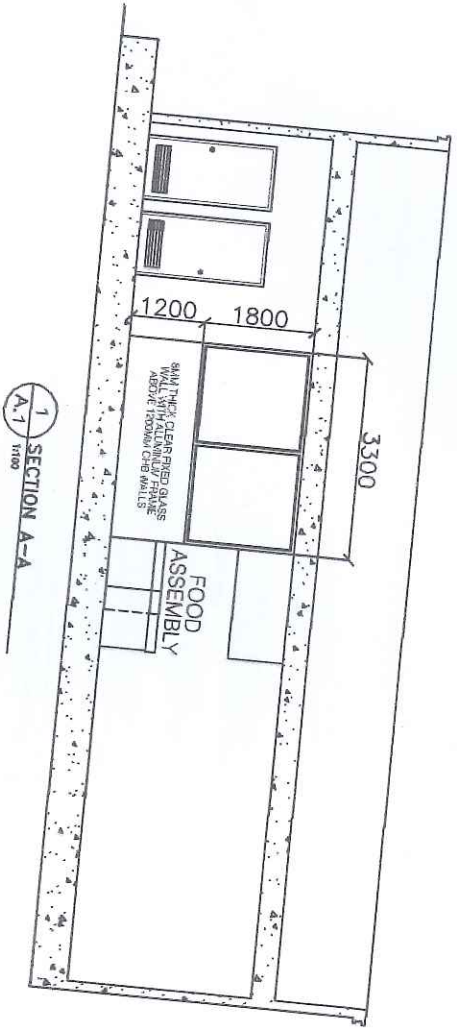

1 SECTION A-A
A.1 1/100

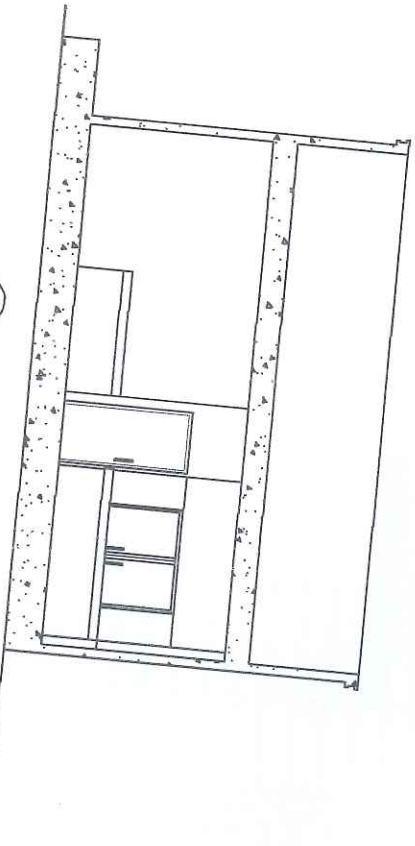

2 SECTION B-B
A.1 1/100

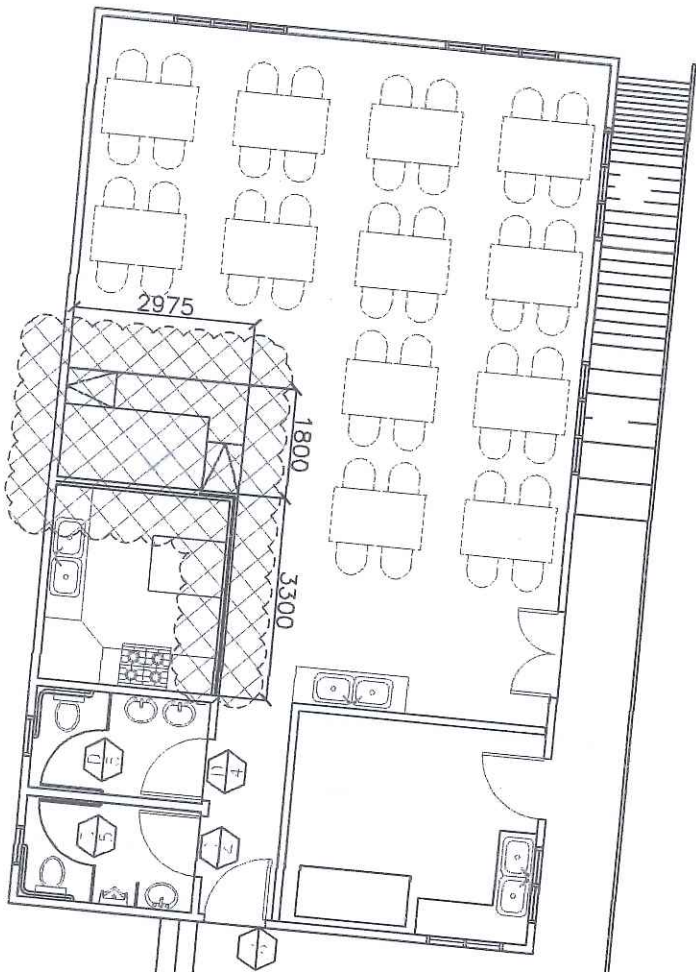

3 PLAN LAYOUT
A.1 1/100

CERTIFIED TRUE COPY

Hevin PAA 10001 CE